


Linear

MOMO Bloc RGB Fixture Guide



Indoor/Outdoor | Recessed | RGB output

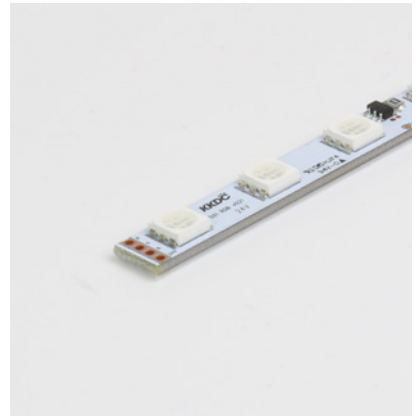


Key applications

- ✓ Architectural detail
- ✓ Direct lighting
- ✓ Exterior
- ✓ In ground
- ✓ Orientation lighting
- ✓ Pathways/driveways
- ✓ Public spaces
- ✓ Uplighting
- ✓ Wall grazing

Key features

- ✓ Custom lengths
- ✓ Constant Voltage (CV)
- ✓ Continuous light runs
- ✓ Diffusion: homogenous
- ✓ Direct view
- ✓ IK08
- ✓ In ground driveover
- ✓ In ground walkover
- ✓ IP67 waterproof

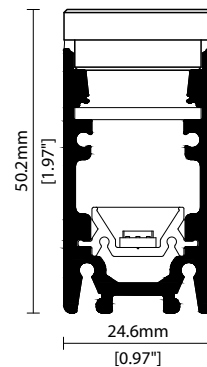

MOUNTING METHODS



KKBG-01 Ground box



KKBG-02 Ground box



KKBG-03 Ground box

Linear

MOMO Bloc RGB

Specification sheet

KKDC





Dimensions	H50.15/W24.6/L524-1024mm (H1.98/W0.97/L20.63-40.31in)
PCB Cut-point	83.3mm increment/1000mm max (3.28in increment/39.37in max)
LED Pitch	13.9mm - 72LED/m (0.55in - 22LED/ft)
Chip	RGB
Cover/Optics	Frosted glass (78°)
CCT	Red 620-625nm/Blue 455-460nm/Green 520-525nm
LED binning	5nm tolerance
CRI	N/A
Lifetime	50,000 hours @ 25°C (50,000 hours @ 77°F)
Operating temp	T _a = -25 to 55°C (T _c max = 67°C) T _a = -13 to 131°F (T _c max = 152.6°F)
IP Rating	IP67
Finish	Silver/Hard anodised (stainless steel ground box)
Mounting	Recessed ground box
Power feed	Sheathed hardwire tails or male/female connectors
Control	0-10V/1-10V/DMX/DALI
Drive over	EN 60598-2-13:2006+A1:2012 (Static load, Torque and Shear load testing)
IK Rating	IEC 62262:2010/IK08



Power consumption	Supply voltage	Supply current
15.6W/m (4.75W/ft)	24V DC	0.65A/m (0.20A/ft)

Frosted

Red: 30lm/m (9lm/ft)
Green: 88lm/m (27lm/ft)
Blue: 14lm/m (4lm/ft)
RGB: 127lm/m (39lm/ft)

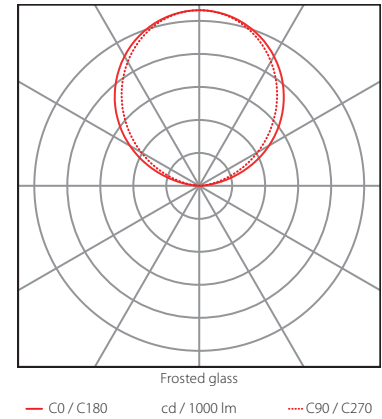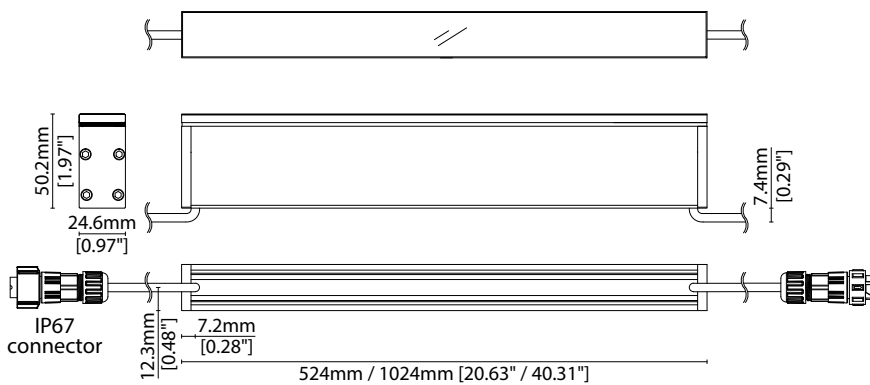

Data derived from IESNA LM-79-08 accredited testing of production samples.

See KKDC website for product document updates.

www.kkdc.lighting

MOMOBlocRGB5-03.04EN-20250806

MOMO Bloc RGB

Code Table



FIXTURE

Model	Finish	Cover ¹	Grade	LED	Colour (CCT)	Length Availability ²	IP	Cable Length	Power Feed ³	Input
MOMO Bloc	BL Silver Anodised Hard Anodised ⁴	SA Frosted Glass HA	M s	501 501	RGB RGB	m 524/1024mm i 20.63/40.31in	IP67 67	300mm/ 11.81" 1000mm/ 39.37"	0300 1000 Single ø4.3mm sheath tail Double ø4.3mm sheath tail Single ø4.3mm sheath IP67 connector Double ø4.3mm sheath IP67 connector	S00A D00A S67A D67A DC 24V g

¹ Refer to **Cover/Lens Options** on **Options** pages

² Refer to **Length Availability List** or enter total run length instead of length code

³ Refer to **Power Feed Options** on **Options** pages

⁴ Hard anodised finish reduces light output by an average of 30%

Code Example:

BL	-	SA	-	M	-	s	-	501	-	RGB	-	m	524	-	67	-	0300	-	D00A	-	g
MOMO Bloc		Silver Anodised		Frosted Glass				501		RGB		524mm		IP67		300mm/11.81"		Double ø4.3mm sheath tail		DC 24V	

ACCESSORIES

Mounting Accessories

KKBG-01	Ground box 01
KKBG-02	Ground box 02
KKBG-03	Ground box 03

* Refer to **Mounting accessories** on **Accessories** pages

Connection Accessories

CN67-4P-0300	4 PIN RGB male & female 300mm/11.81" pair
CN67-4P-1000	4 PIN RGB male & female 1000mm/39.37" pair
CN67-4P-3000	4 PIN RGB male & female 3000mm/118.11" pair

* Refer to **Power feed** on **Accessories** pages

Exterior Junction Boxes

KKJB-07	IP67 Slim J-Box
KKJB-07R	Potting Resin for IP67 Slim J-Box

* Refer to **Exterior Junction Boxes** on **Accessories** pages

PSU/Driver

0-10V/1-10V/DALI/DMX

* Refer to **Driver/PSU Options** page for details or provide requirement and KKDC to offer the suitable option

LED ENGINE VARIANTS (LED STRIP TYPE)

Colour	LED	Lumen/m	Lumen/ft	W/m	W/ft	Spec Doc	Length	Increment
Single CCT	R007	145	44	7	2.13	MOMO Bloc R007	524-1024mm (20.63-40.31in)	41.7mm (1.64in)
	R014	300	91	14	4.27	MOMO Bloc R014	524-1024mm (20.63-40.31in)	41.7mm (1.64in)
	R020	444	135	20	6.10	MOMO Bloc R020	524-1024mm (20.63-40.31in)	41.7mm (1.64in)
RGB	501	Red: 30 Green: 88 Blue: 14 RGB: 127	Red: 9 Green: 27 Blue: 4 RGB: 39	15.6	4.75	MOMO Bloc RGB	524-1024mm (20.63-40.31in)	83.3mm (3.28in)

* Performance data: RGB, frosted glass

Linear

MOMO Bloc RGB

Length Availability List




Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)			
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		R	G	B	W
m0520	i0020	524mm	20.63in	500mm	19.69in	10mm	0.39in	7.80	62	126	21	199
m1020	i0040	1024mm	40.31in	1000mm	39.37in	10mm	0.39in	15.60	124	252	41	398

¹ Actual total overall length of light fixture (LED strip + end caps + void/wire hole)

² Actual length of PCB strip

³ Actual length of 2x end caps

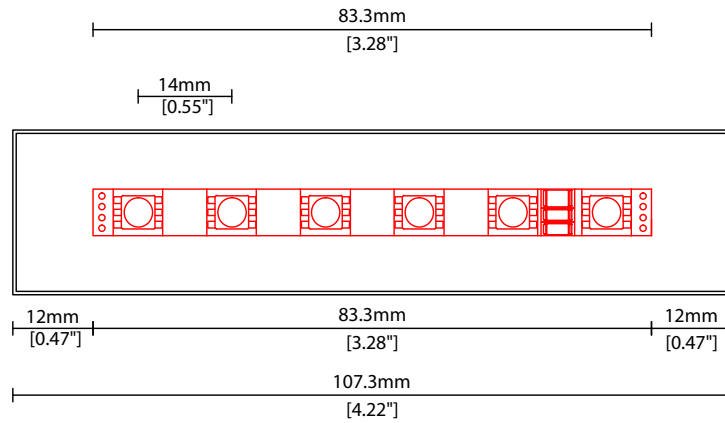


Linear

MOMO Bloc RGB Options

KKDC

COVER/LENS OPTIONS


* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.




M Frosted Glass Cover
W24.6/H50.2mm (W0.97/H1.97")

POWER FEED OPTIONS


0300 S00A 300mm (11.81") Single Ø4.3mm sheath tail




0300 D00A 300mm (11.81") Double Ø4.3mm sheath tail




0300 S67A 300mm (11.81") Single Ø4.3mm sheath connector IP67 (Premoulded)




0300 D67A 300mm (11.81") Double Ø4.3mm sheath connector IP67 (Premoulded)




1000 S00A 1000mm (39.37") Single Ø4.3mm sheath tail




1000 D00A 1000mm (39.37") Double Ø4.3mm sheath tail



1000 S67A 1000mm (39.37") Single Ø4.3mm sheath connector IP67 (Premoulded)



1000 D67A 1000mm (39.37") Double Ø4.3mm sheath connector IP67 (Premoulded)

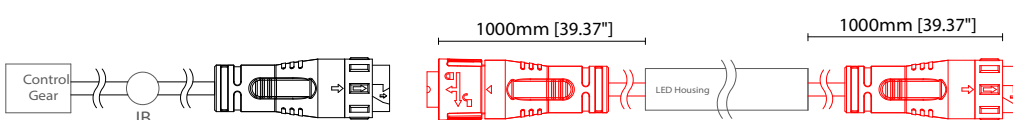

Key

- Control Gear Power supply, sub-controllers & control systems
- JB Junction box / cable connection


Linear

MOMO Bloc RGB Options




POWER FEED OPTIONS (CONTINUED)

4 Pin RGB Female Connector IP67 (Premoulded)

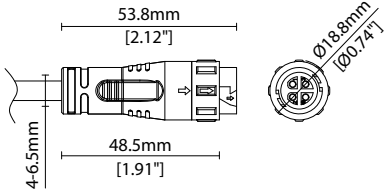

4 Pin RGB Male Connector IP67 (Premoulded)

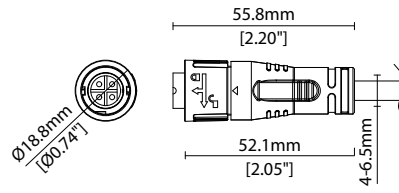


MOUNTING ACCESSORIES

Note: Accessories are to be ordered separately with corresponding code shown below.




KKBG-01 *

Ground box 01
Stainless steel finish
W79.1/H76.5mm (W3.11/H3.01")
* Specify length to match BLOC

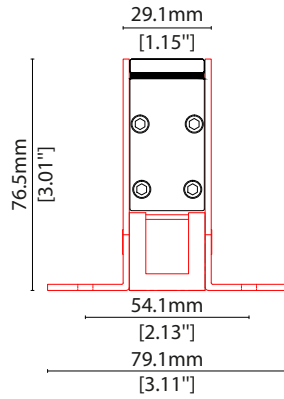


KKBG-02 *

Ground box 02
Stainless steel finish
W54.1/H76.5mm (W2.13/H3.01")
* specify length to match BLOC

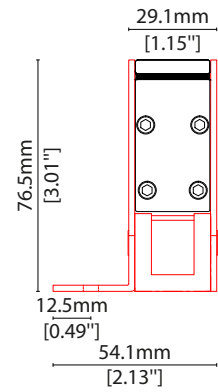


KKBG-03 *

Ground box 03
Stainless steel finish
W29.1/H76.5mm (W1.15/H3.01")
* specify length to match BLOC



POWER FEED



CN67-4P-0300 300mm (11.81in) pair
CN67-4P-1000 1000mm (39.37in) pair

IP67

4 PIN male + female (RGB/LEDmix) connector set



CN67-4P-3000 3000mm (118.11in) pair

IP67

4 PIN male + female (RGB/LEDmix) connector set

EXTERIOR JUNCTION BOXES



KKJB-07

IP67 Slim J-Box
(including type A,B,C, D bushings)



KKJB-07R

Potting resin for IP67 Slim J-Box

KKDC CONTROL



IP20
Plastic housing
L170/W59/H29mm
(L6.69/W2.32/H1.14in)

KKDM-06 1-10V
visDIM dimmable sub-controller
(4 x 8A max @ 12-36V)



IP20
Plastic housing
L170/W53.4/H28mm
(L6.69/W2.10/H1.10in)

KKSC-05 DMX
visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)



IP20
Plastic housing
L170/W59/H29mm
(L6.69/W2.32/H1.14in)

KKDL-02 DALI
visDIM dimmable sub-controller
(4 x 8A max @ 12-36V)



IP20
Plastic housing
L166/W53.4/H23mm
(L6.54/W2.10/H0.91in)

KKDL-03 DALI
visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)



IP20
Plastic housing
L170/W53.4/H28mm
(L6.69/W2.10/H1.10in)

KKDL-04 DALI-2
visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)

AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-06	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-06	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-06	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
DALI	CEN-60-24	KKDL-02/03/04/visDIM PRO 30	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-60H-24	KKDL-02/03/04/visDIM PRO 30	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03/04/visDIM PRO 30	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03/04/visDIM PRO 30	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03/04/visDIM PRO 30	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-05	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-05	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-05	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-05	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

¹ The items shown above cover the most frequently used specification but does not exhaust the possible options

² PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

³ Electrical shop drawing will include detailed information of PSU and relevant control drivers

⁴ Cut sheets are available on the controls section of www.kkdc.lighting or upon request